



Price/Data Sheet – HALCCT101

Hook & Loop Tape Type 101

Adhesive backed (Rubber 10)

Sizes available widths (mm): 16, 20, 25, 30, 38, 50, 75, 100, 150mm

Length: 25m rolls or cut pieces


Prices for adhesive backed hook & loop tape

Part	Type	Tape width	Tape Length	Cost ex VAT
HAL205H	Hook	20mm	5m	9.80
HAL205L	Loop	20mm	5m	9.80
HAL2520H	Hook	20mm	25m	11.64
HAL2520L	Loop	20mm	25m	11.64
HAL2525H	Hook	25mm	25m	14.72
HAL2525L	Loop	25mm	25m	14.72

Plus delivery cost as required.

Pricing for alternative sizes is available on request.

Costs shown in GBPE.

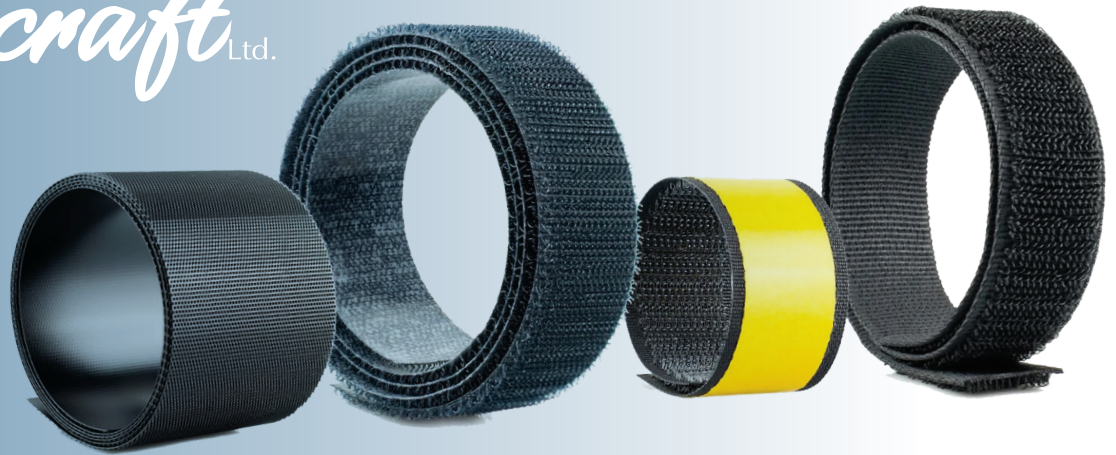

Adhesive specification

An adhesive backed premium hook & loop system comprising of a synthetic rubber and resin system adhesive coating to the back of the hook & loop tape, giving a strong instant bond.

Adhesive colour: light yellow

Performance: a strong instant bond

Typical application: immediate adhesion to a variety of surfaces including paper, wood, polythene, metal, glass, plastic etc (excluding plasticised PVC)



Item	Properties	Unit	Standard		Test method
WDS4	Tape test – adhesive holding	Minutes	646	686	PSTC-7
WDS4	Tape test – shear adhesion temperature fail level	°C	60	60	PSTC-7
WDS4	180°C peeling adhesion	Kg/cm	1.34	1.38	PSTC-1
WDS4	Shear strength	Kg/cm ²	0.85		CNS12649 L3227
WDS4	Peel strength	g/cm	200		CNS12649 L3227
WDS4	Tearing strength	Kg	2		ASTM D2261

Not recommended for direct exposure to sunlight and UV

Application guide

To be avoided on surfaces of humidity, dust, oil etc

Application and performance temperature from +5 to 40+ degrees Celsius

Customer attention

The above points are suggestions and are not to be considered guarantees. All tapes should be tested in working conditions before long term use.